



Like all FH Group® auto accessories, these custom car seat covers were designed with the utmost precision, created from the highest quality of materials, and produced with the intent of providing every driver with a tailored luxury car experience. With FH Group® you will always Take Pride In Your Ride™.

To register for the Custom Seat Cover Limited Warranty, go to <https://www.fhgroupauto.com/warranty/>



INSTALLATION MANUAL

CM5006 - Jeep Wrangler JL 4DR 2018-2021

No matter how off-road you go, FH Group always has you covered.



CM5006-FRONT

Video instructions are available at
<https://www.fhgroupauto.com/product/jeep-wrangler-jl/>




Warning


- Machine wash cold, delicate cycle. Air dry only.
- Avoid sharp objects to protect covers from being scratched/damaged.
- We suggest wearing protective eyewear and gloves during installation.

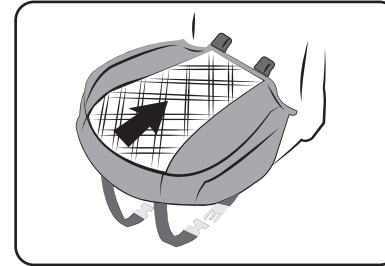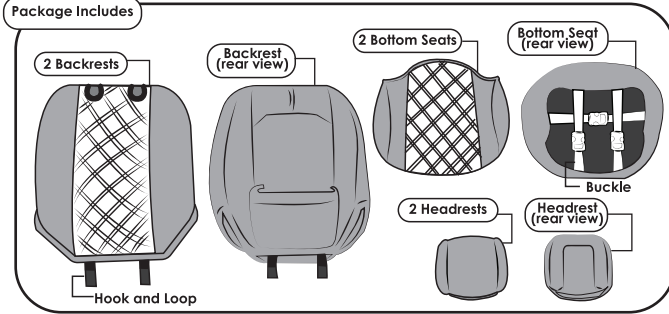


- 5 Once secured, slide the bottom seat covers onto your car seats. Make sure the backrest covers are aligned with the bottom seat covers. Push the straps through the crevice of the seat.

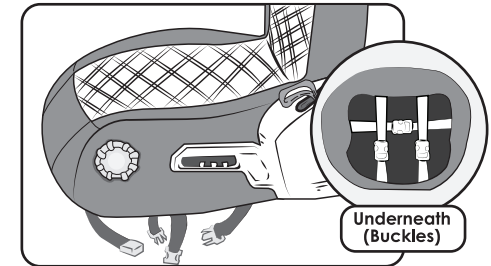


- 6 Attach the buckles underneath the seat and tighten the straps as needed. Once the covers are installed, add the finishing touches by adjusting the seat controls accordingly. Follow the contour of the seat covers ensuring everything is tucked in.

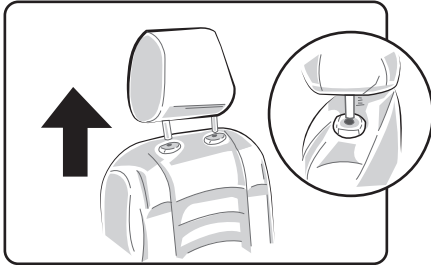


- 1 Detach the headrest by simply pressing the button located at the base of the headrest. Then simply lift the headrest to separate it from the backrest.

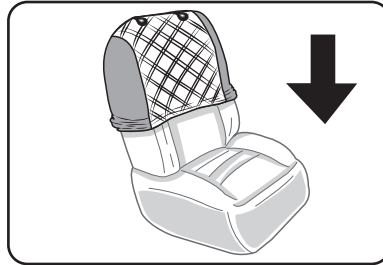


- 2 Place the backrest cover over the seat, making sure to align the holes for the headrests accordingly.

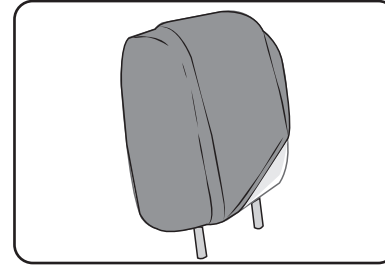


- 7 Slip on the headrest cover. TIP: Starting from either side of the headrest and sliding the cover sideways will help you achieve a secure fit.

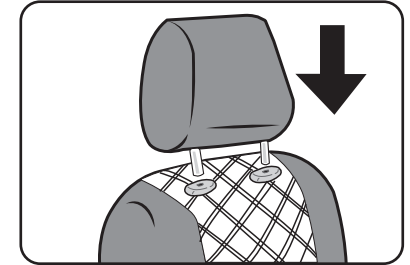


- 8 Finally reattach the headrest to the top of the car seat.

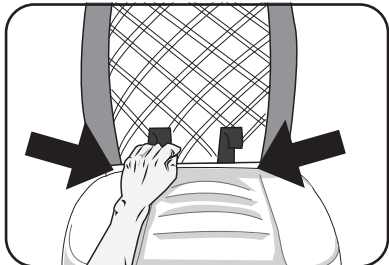

- 3 Locate the hook and loop straps at the bottom of the backrest and push through the center crevice of the seat.

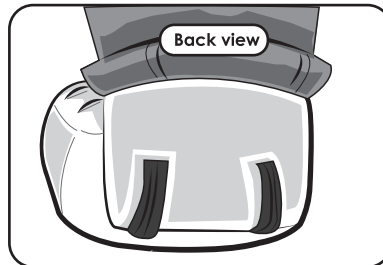

- 4 Once the hook and loop straps are pulled through the crevices of the seat, lift the flap of the seat cover and attach those hook and loop straps to the back portion of the carpeted seat.

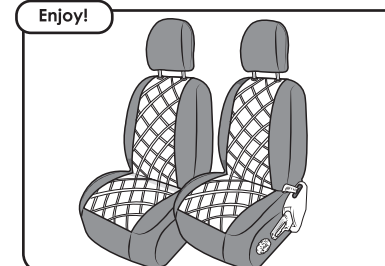

- 9 Adjust accordingly, smooth out your custom-fit seat covers and enjoy!