



Like all FH Group® auto accessories, these custom car seat covers were designed with the utmost precision, created from the highest quality of materials, and produced with the intent of providing every driver with a tailored luxury car experience. With FH Group® you will always Take Pride in Your Ride!™.

To register for the Custom Seat Cover Limited Warranty, go to <https://www.fhgroupauto.com/warranty/>



**FRONT
SEAT**



INSTALLATION MANUAL

HONDA PILOT 2016-2022

Keep your investment protected with the custom-fit FH Group Honda Pilot seat covers.


CM5027-FRONT SEAT COVERS

Video instructions are available at
<https://www.fhgroupauto.com/product/neoprene-custom-fit-seat-covers-for-2016-2022-honda-pilot-front-set/>




WARNING


- Machine wash cold, delicate cycle. Air dry only.
- Avoid sharp objects to protect covers from being scratched/damaged.
- We suggest wearing protective eyewear and gloves during installation.

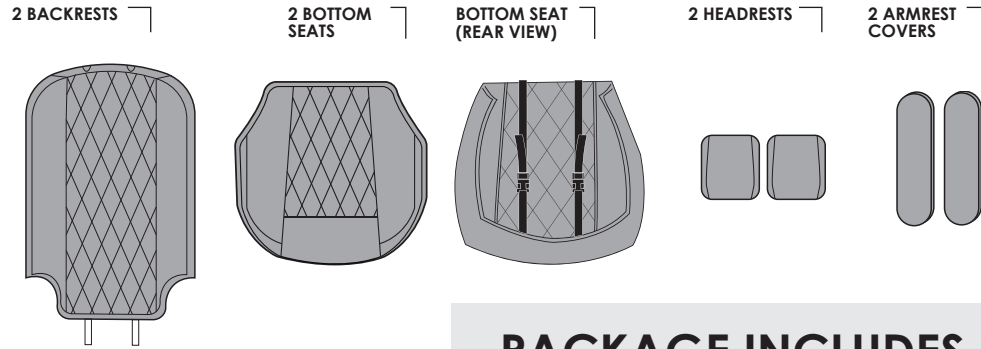


PACKAGE INCLUDES

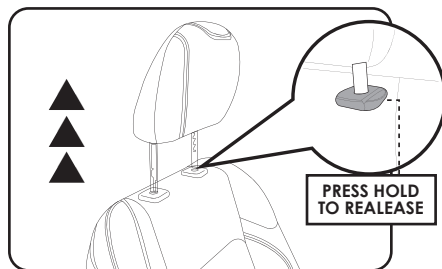


- 1 Detach the headrest by pressing the button located at the base of the headrest. Then simply lift the headrest to separate it from the backrest.

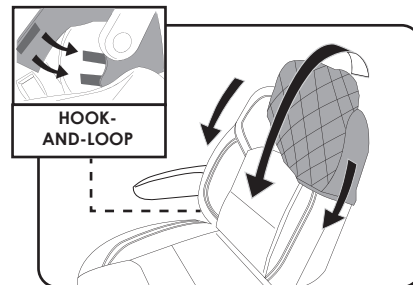


- 2 Place the backrest cover over the seat making sure the headrest openings are aligned accordingly. Then, connect the hook-and-loop attachments located underneath the armrest.

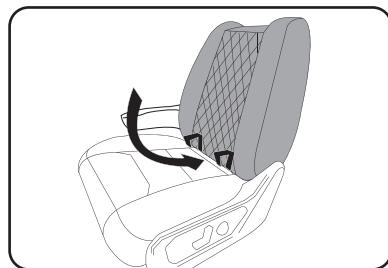


- 3 Insert the front straps through the crevice of the seat and push them until they come out at the back of the seat.

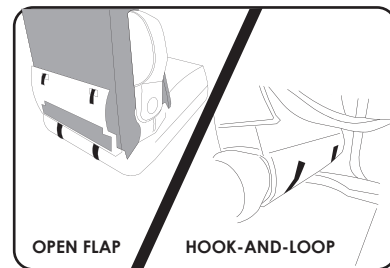


- 4 Detach the seat's backrest flap from the seat's bottom. Then, pull the hook-and-loop straps you pushed through the seat crevice and attach them to the flap after you attach the flap to its original position.

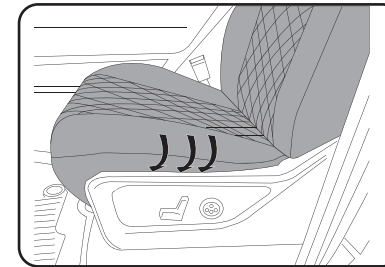


- 5 To install the bottom cover, place it on your car seat making sure it follows the contour of your seat. Then, tuck in the corners of the cover and ensure the cover aligns and accommodates the seat's controls. Also make sure you pass your seat belt holder through the loop.

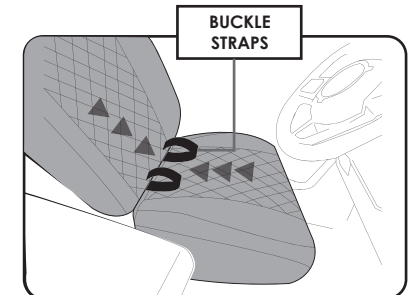


- 6 Push the buckle straps through the seat crevice.

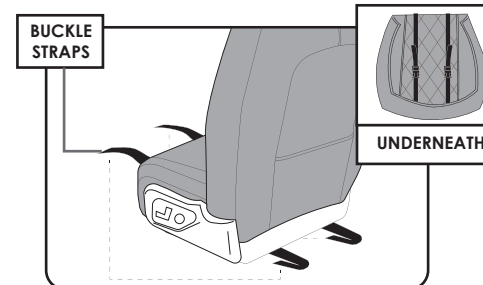


- 7 Connect together the front and rear buckle straps under the seat. Your buckle straps should be connected together as shown in the image above.

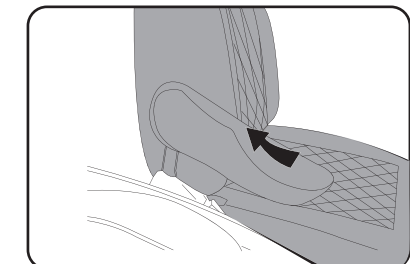

- 8 Slide your armrest cover over your vehicle's armrest.

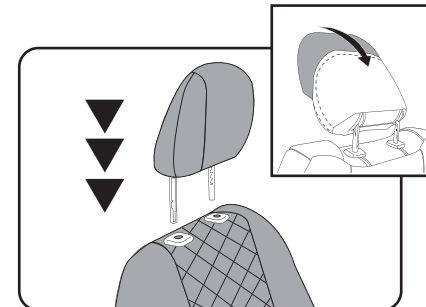

- 9 Reattach the headrests to the seats and slip on the headrest covers. TIP: Starting from either side of the headrest and sliding the cover sideways will help you achieve a secure fit.

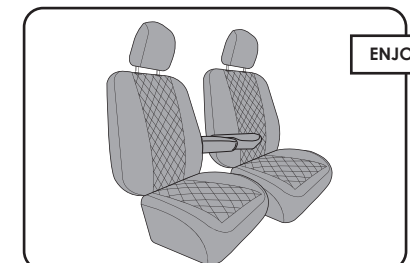

- 10 Adjust accordingly and smooth out your custom-fit seat cover!

ENJOY