



Like all FH Group® auto accessories, these custom car seat covers were designed with the utmost precision, created from the highest quality of materials, and produced with the intent of providing every driver with a tailored luxury car experience. With FH Group® you will always *Take Pride in Your Ride!*™

To register for the Custom Seat Cover Limited Warranty, go to <https://www.fhgroupauto.com/warranty/>



FRONT  
SEAT



# INSTALLATION MANUAL

TOYOTA HIGHLANDER LE 2025

Keep your investment protected with the backing of FH Group's 3-Year Limited Warranty.

# CM5028-FRONT SEAT COVERS


Video instructions are available at




## WARNING

- Machine wash cold, delicate cycle. Air dry only.
- Avoid sharp objects to protect covers from being scratched/damaged.
- We suggest wearing protective eyewear and gloves during installation.


2 BACKREST COVERS

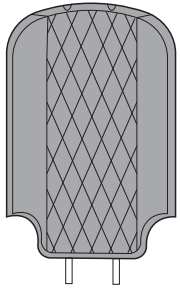


2 BOTTOM SEATS




BOTTOM SEAT (REAR VIEW)




2 HEADRESTS




## PACKAGE INCLUDES

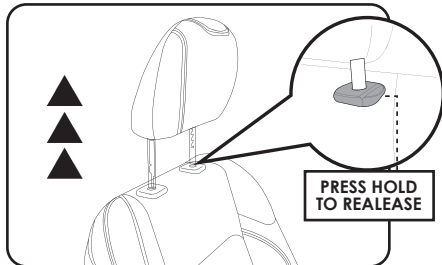


- 1 Detach the headrest by pressing the button located at the base of the headrest. Then simply lift the headrest to separate it from the backrest.

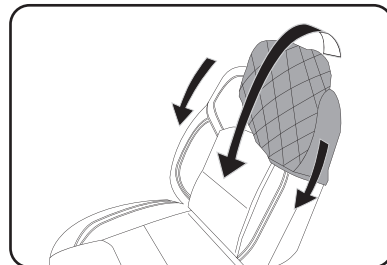


- 2 Slide the backrest cover over your seat's backrest until it's fully on. Please make sure to follow the seat's contour.

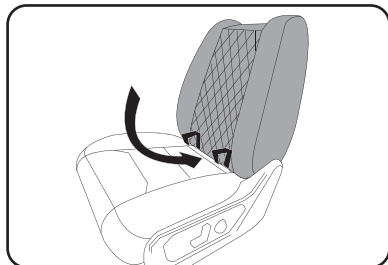


- 3 Insert the front straps through the crevice of the seat and push them until they come out at the back of the seat.

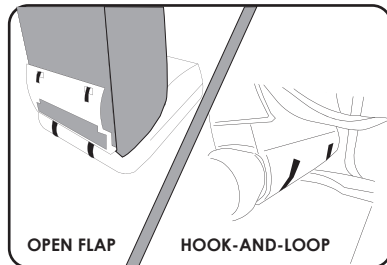


- 4 Detach the seat's backrest flap from the seat's bottom. Then, pull the hook-and-loop straps you pushed through the seat crevice and attach them to the flap after you attach the flap to its original position.

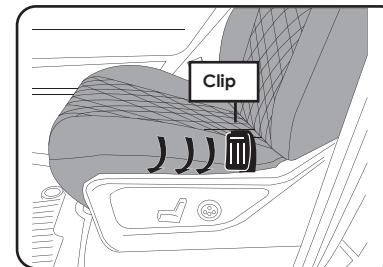


- 5 To install the bottom cover, place it on your car seat making sure it follows the contour of your seat. Then, tuck in the corners of the cover and ensure the cover aligns and accommodates the seat's controls. Also tuck in your seat cover clip.

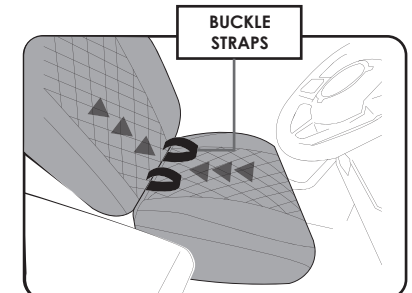


- 6 Push the buckle straps through the seat crevice.

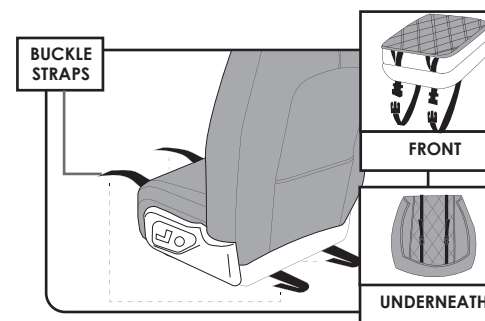

- 7 Before connecting the buckle straps underneath the seat bottom, please make sure the front buckle straps go in between the plastic seat molding and the cushion. Then, secure the straps tight underneath the seat.

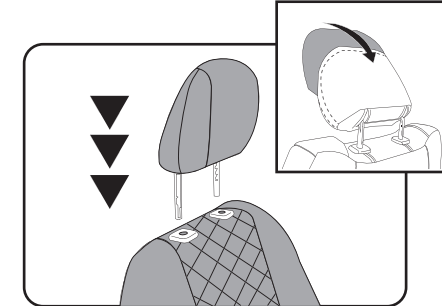

- 8 Reattach the headrests to the seats and slip on the headrest covers. TIP: Starting from either side of the headrest and sliding the cover sideways will help you achieve a secure fit.

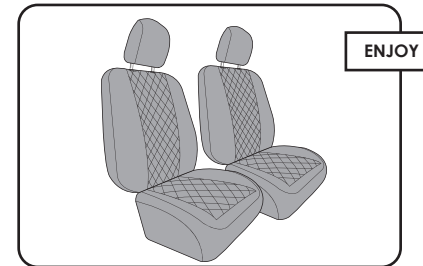

- 9 Adjust accordingly and smooth out your custom-fit seat cover!