


CM5003-FRONT


Video instructions are available at https://www.fhgroupauto.com/product/seat-covers-jeep-wrangler-jk-2007-2018/



Warning

- Machine wash cold, delicate cycle. Air dry only.
- Avoid sharp objects to protect covers from being scratched/damaged.
- We suggest wearing protective eyewear and gloves during installation.

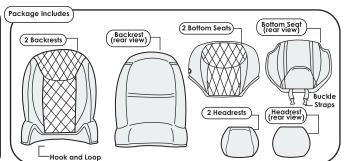





Detach the headrest by simply pressing the button located at the base of the headrest. Then simply lift the headrest to separate it from the backrest.




2) Place the backrest cover over the seat, making sure to align the holes for the headrests accordingly.




(3) Once secured, slide the bottom seat covers onto your car seats. Make sure the backrest covers are aligned with the bottom seat covers.




(4) Locate the two butterfly discs on the front of the cushion. Push the butterfly discs through the seat crevice and position the discs upward against the back of the seat.



(5) Slide the bottom seat covers onto the seat. Push the rear straps through the seat crevice. Attach the rear and front straps underneath the seat using the buckles.



(6) Slip on the headrest cover. TIP: Starting from either side of the headrest and sliding the cover sideways will help you achieve a secure fit.



(7) Finally reattach the headrest to the top of the car seat.



Adjust accordingly, smooth out your custom-fit seat covers and enjoy!