

CM5007-FRONT





Product details are available at
<https://www.fhgroupauto.com/product/gmc-sierra/>


Warning

- Machine wash cold, delicate cycle. Air dry only.
- Avoid sharp objects to protect covers from being scratched/damaged.
- We suggest wearing protective eyewear and gloves during installation.


Package Includes

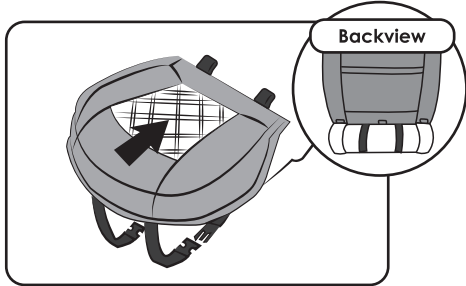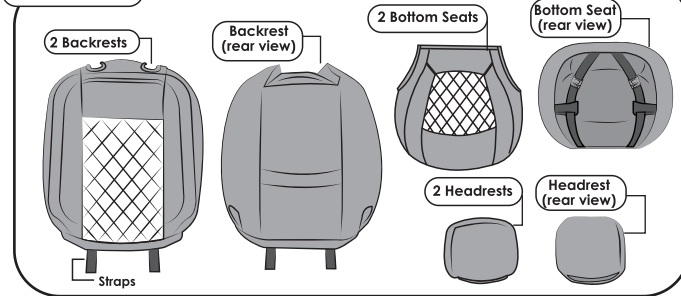


- 1** Slide the bottom seat covers onto the seat. Push the rear straps through the seat crevice and pull through the backside of your bottom seats. See image above.

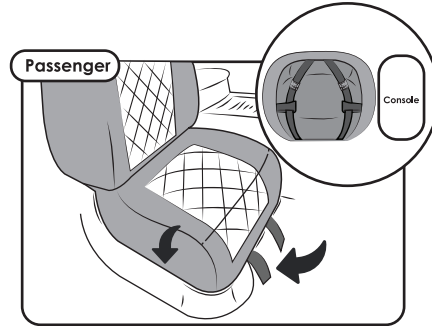


- 2a** Place the bottom seat cover on to the passenger seat. Tuck the side of the seat cover near the center console into the crevice of the car seat. Finally, attach the buckle straps underneath your seat. Recommended: Use a plastic tool to assist with tucking the seat cover in neatly.

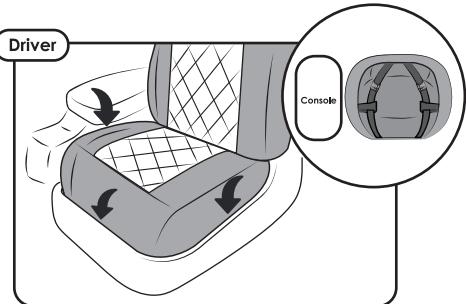


- 2b** Place the bottom seat cover on to the driver's seat. Tuck the side of the seat cover near the center console into the crevice of the car seat. Finally, attach the buckle straps underneath your seat. Recommended: Use a plastic tool to assist with tucking the seat cover in neatly.

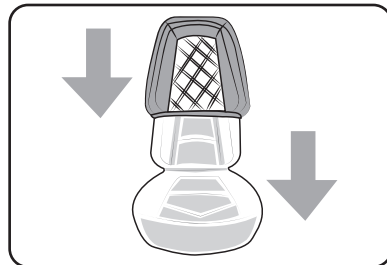


- 3** Open the hook-and-loop closures at the top of the backrest. Slide the backrest cover down over the headrest.

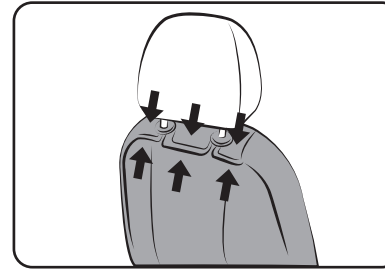


- 4** After the backrest is pulled down, close the top by securing the hook-and-loop pieces together around the base of the headrest.

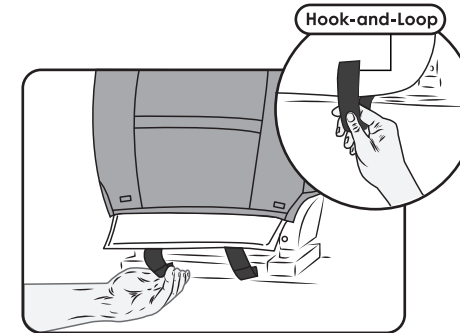


- 6** Remove the factory clips underneath the car seat to expose the underside of your car seats. Pull the hook-and-loop straps behind the seat. Then simply tape your hook-and-loop straps to the back of the seat.

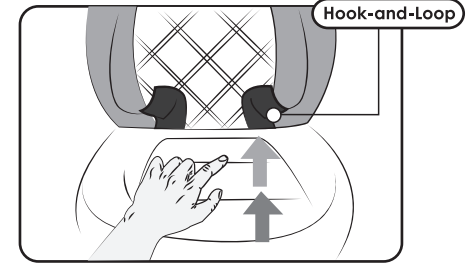


- 5** Push the straps through the seat crevice, and position the straps to the back of the seat. When you push the straps through, the passage will be blocked. Please go to the next step for further instructions.

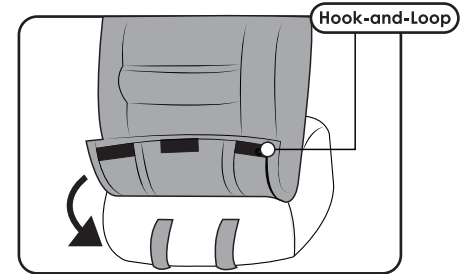

- 7** Locate the hook-and-loop straps at the back of the backrest cover and attach them directly to the car seat's upholstery.

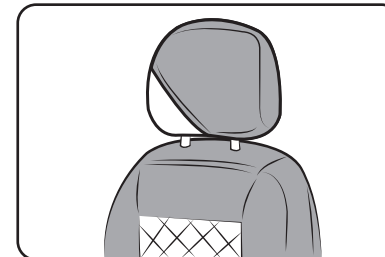

- 8** Slip on the headrest cover. TIP: Starting from either side of the headrest and sliding the cover sideways will help you achieve a secure fit.

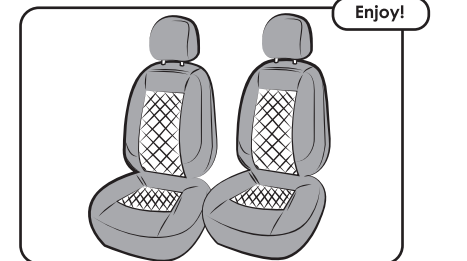

- 9** Adjust accordingly, smooth out your custom fit seat covers and enjoy!