
CM5015-FRONT


Product details are available at https://www.fhgroupauto.com/product/tesla-model-y/

Warning

- Machine wash cold, delicate cycle. Air dry only.
- Avoid sharp objects to protect covers from being scratched/damaged.
- We suggest wearing protective eyewear and gloves during installation.



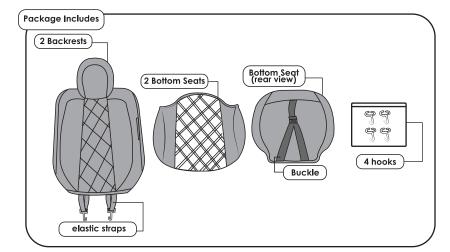




Slide the backrest cover down over the headrest and seat.




② Once the backrest is pulled down, carefully tuck in the excess car seat cover fabric into the crevice of the rear panel on the Tesla car seat. Use a plastic tool to assist with tucking the seat cover in neatly.




(3) Push the straps through the seat crevice, and position the straps to the back of the seat.




(4) Locate the two hooks in the bag. Attach the hooks to the straps that were pushed through the crevice. Find a secure place to attach the hooks underneath your car seat.

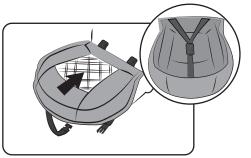

(5) Slide the bottom seat covers onto the seat. Push the rear straps through the seat crevice. Attach the rear and front straps underneath the seat using the buckles.



(a) Place the bottom seat cover on to the passenger seat. Tuck the side of the seat cover near the center console into the crevice of the car seat. Recommended: Use a plastic tool to assist with tucking the seat cover in neatly.

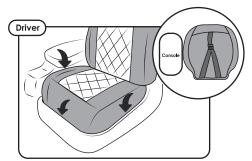

(b) Place the bottom seat cover on to the driver's seat. Tuck the side of the seat cover near the center console into the crevice of the car seat. Finally, attach the buckle straps underneath your seat. Recommended: Use a plastic tool to assist with tucking the seat cover in neatly.



7 Adjust accordingly, smooth out your custom fit seat covers and enjoy!