

CM5015-REAR





Product details are available at
<https://www.fhgroupauto.com/product/tesla-model-y/>


PACKAGE INCLUDES

Warning


- Machine wash cold, delicate cycle. Air dry only.
- Avoid sharp objects to protect covers from being scratched/damaged.
- We suggest wearing protective eyewear and gloves during installation.

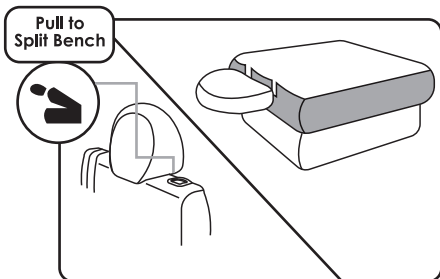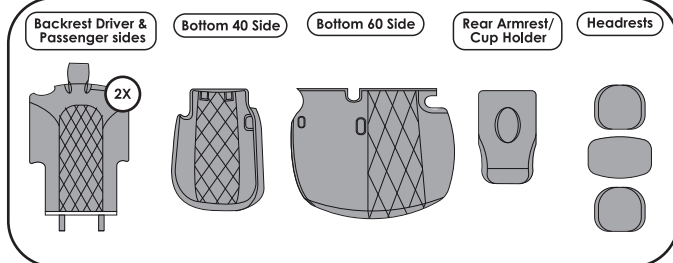


- 1** Slide the backrest driver side cover onto backrest following the contour of the seat, until it's fully on the backrest. Then, close the hook-and-loop straps near the seatbelt holder and tuck in the reminder fabric in the seat crevice. Repeat this process with the passenger side backrest.

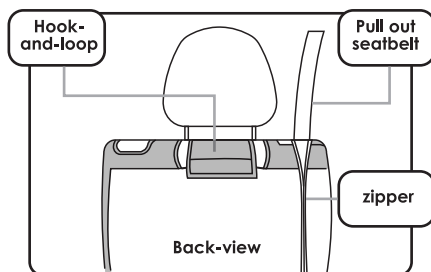


- 2** After you successfully place the seat cover over the backrest, slide the piece of fabric underneath the headrest and attach the hook-and-loop to the back of the seat. Also, make sure you unzip the zipper and pull out the seatbelt as shown in the image above.

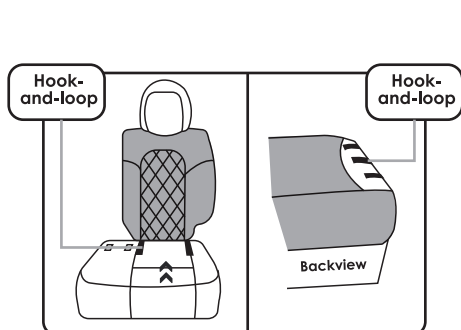


- 3** Push the bottom hook-and-loop straps through the seat crevice. Then, attach the straps directly to the upholstery of the back of the seat.

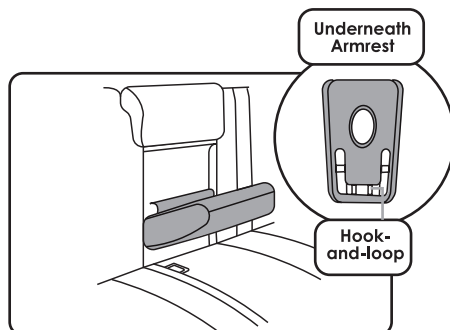


- 4** Fold the center armrest section of your car seat and slide over your armrest cover. Be sure to attach the hook-and-loop as shown in the image above.

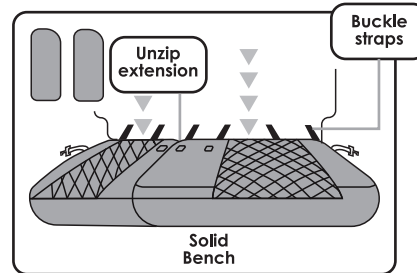


- 5** To create the solid bottom bench, unzip both individual extension pieces and connect the bottom 60 and 40 sides covers together. Then, place the seat bottom on your car seat and push the buckle straps to the center crevice of the seat.

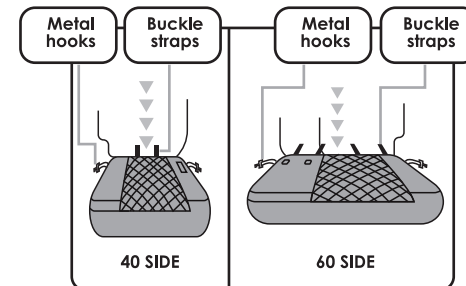


- 6** For the split bench Tesla, place the bottom 60 and 40 side covers on each seat bottom and push the buckle straps to the center crevice of your car seat.

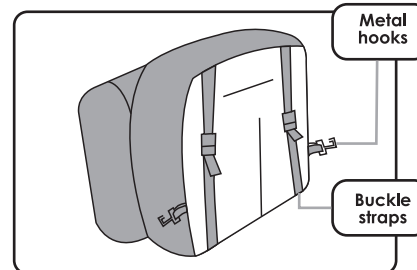


- 7** Attach the buckles of your Bottom 40 Side covers, according to the image above.

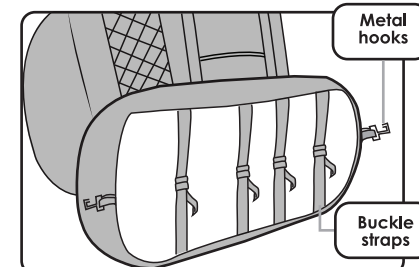

- 8** Attach the buckles of your Bottom 60 Side covers, according to the image above.

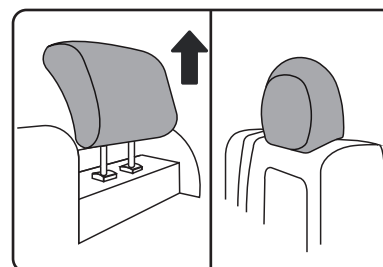

- 9** Slip on the headrest cover and reattach the headrests. TIP: Starting from either side of the headrest and sliding the cover sideways will help you achieve a secure fit. Repeat same process for all headrests.

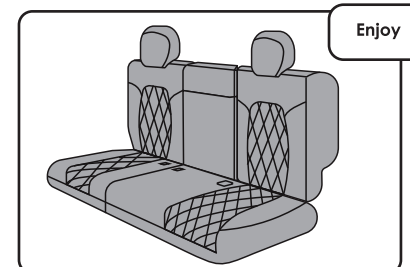

- 10** Adjust accordingly, smooth out your custom-fit seat covers, and enjoy!