

# CM5016-FRONT COVER:



Video instructions are available at  
<https://www.fhgroupauto.com/product/honda-accord>




## Warning

- Machine wash cold, delicate cycle. Air dry only.
- Avoid sharp objects to protect covers from being scratched/damaged.
- We suggest wearing protective eyewear and gloves during installation.


## Package Includes

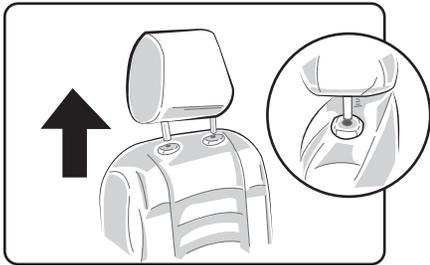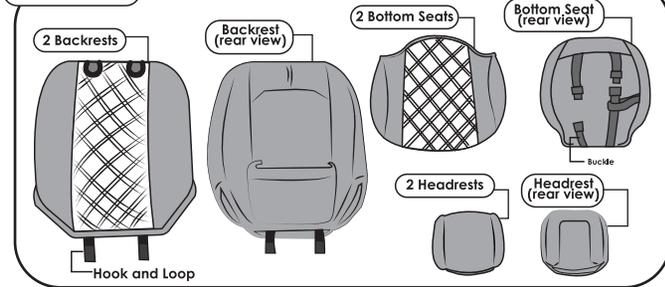


- 1 Detach the headrest by pressing the button located at the base of the headrest. Then simply lift the headrest to separate it from the backrest.

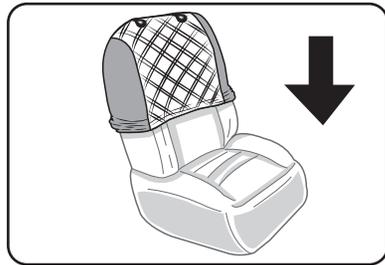


- 2 Place the backrest cover over the seat, making sure to align the holes for the headrests accordingly.

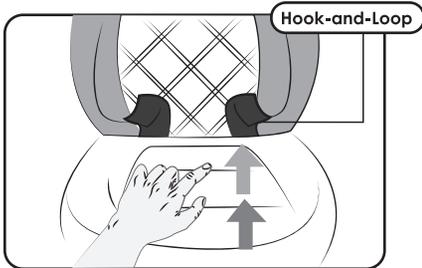


- 3 Push the straps through the seat crevice, and position the straps to the back of the seat.

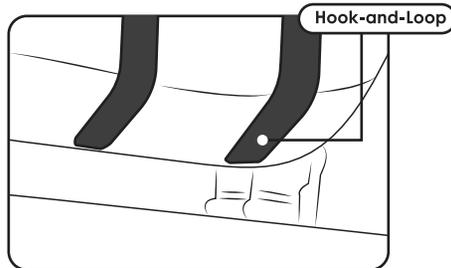


- 4 Attach the hook-and-loop straps that were pushed through the crevice underneath the car seat as shown in the image above.

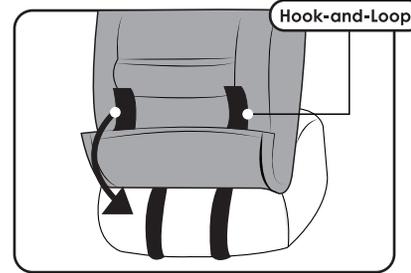


- 5 Locate the hook-and-loop straps at the back of the backrest cover and attach them directly to the car seat's upholstery.

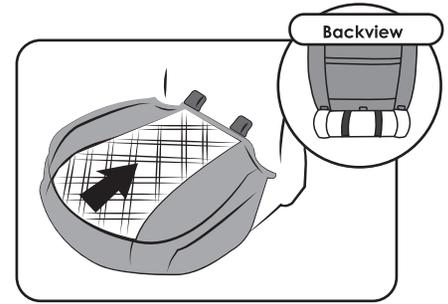


- 6 For the bottom seat covers, push the buckle straps into the seat crevice and pull through the backside of your bottom seats. See image above.

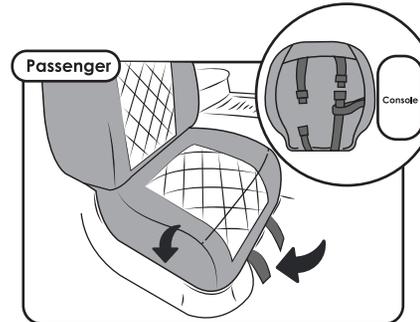


- 7a Place the bottom seat cover on to the passenger seat. Tuck the side of the seat cover near the center console into the crevice of the car seat. Finally, attach the buckle straps underneath your seat. Recommended: Use a plastic tool to assist with tucking the seat cover in neatly.

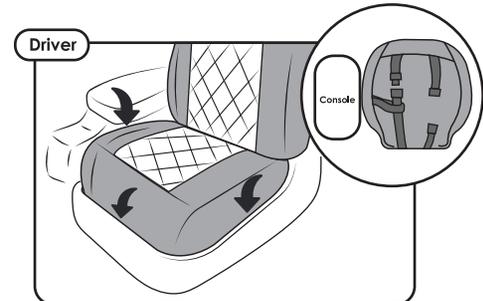

- 7b Place the bottom seat cover on to the driver's seat. Tuck the side of the seat cover near the center console into the crevice of the car seat. Finally, attach the buckle straps underneath your seat. Recommended: Use a plastic tool to assist with tucking the seat cover in neatly.

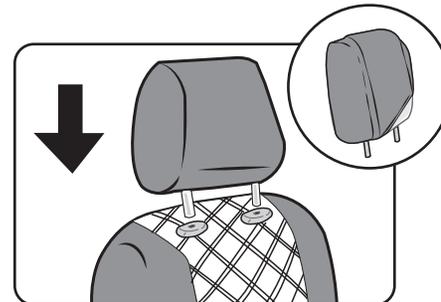

- 8 Slip on the headrest cover. TIP: Starting from either side of the headrest and sliding the cover sideways will help you achieve a secure fit. Finally reattach the headrest to the top of the car seat.

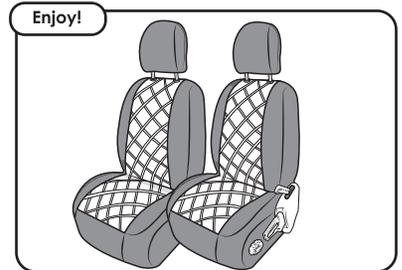

- 9 Adjust accordingly, smooth out your custom-fit seat covers and enjoy!