



CM5024-REAR




PACKAGE INCLUDES




Backrest 60 Side



Backrest 40 Side



60 Side Bottom Seat



40 Side Bottom Seat




Headrest

Product details are available <https://www.fhgroupauto.com/product/custom-fit-seat-covers-2011-2021-jeep-grand-choke/>


Warning

- Machine wash cold, delicate cycle. Air dry only.
- Avoid sharp objects to protect covers from being scratched/damaged.
- We suggest wearing protective eyewear and gloves during installation.

READ → ↓



Pull the lever located near the headrest to unlock the seat's backrest. Then, fold the split backrest.

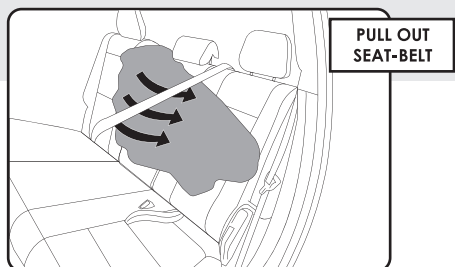


PULL OUT SEAT-BELT

- ① To install the backrest 60 side cover, split the 60/40 backrest of your seat. Then, take the cover, open the headrest openings and the back zipper and place it on the seat's backrest following the contour of the seat. Make sure you pull out the seatbelt when installing the cover.




BACK VIEW

- ② Secure the backrest cover around the headrest base by attaching the hook-and-loop patches to the seat's upholstery. Then, zip up the zipper on the back.

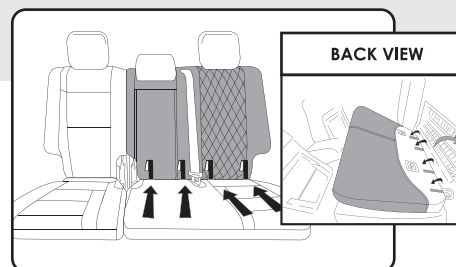


BACK VIEW

- ③ Once the backrest cover is on, push the hook-and-loop straps (indicated by the arrows) through the crevice of the seat and attach them directly to the seat's backrest upholstery as shown in the image above. We recommend splitting the car seat for this step.

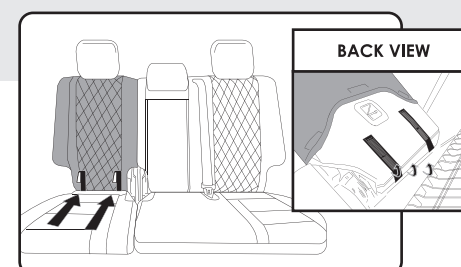


BACK VIEW

- ④ Place the backrest 40 side cover onto the backrest and push the hook-and-loop straps through the seat's crevice. Then, attach the straps directly to the upholstery of the seat's backrest and secure the cover around the headrest base.

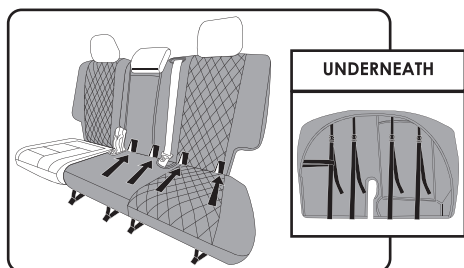


UNDERNEATH

- ⑤ To install the bottom cover 60 side, place the cover on the seat's bottom following its contour. Then, push the straps through the seat crevice and attach the front buckle straps underneath the seat following its contour and accommodating the seatbelt buckles.

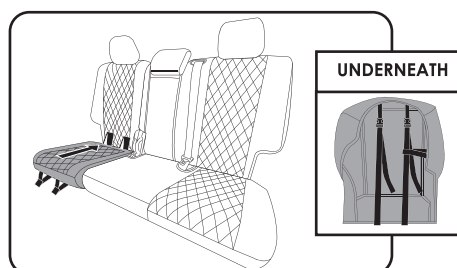


UNDERNEATH

- ⑥ To install the bottom cover 40 side, place the cover on the seat's bottom following its contour. Then, push the straps through the seat crevice and attach them to the front buckle straps underneath the seat.

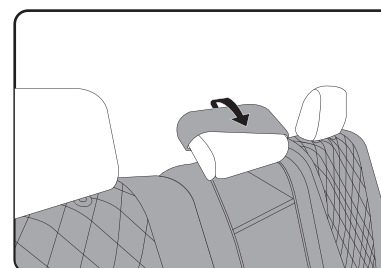

- ⑦ Slip on the headrest covers. TIP: Starting from the top of the headrest and sliding the cover down will help you achieve a secure fit.

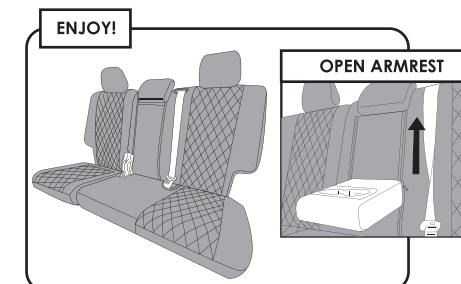

ENJOY!

OPEN ARMREST

- ⑧ Adjust accordingly, smooth out your custom-fit seat covers, and enjoy!