



Like all FH Group® auto accessories, these custom car seat covers were designed with the utmost precision, created from the highest quality of materials, and produced with the intent of providing every driver with a tailored luxury car experience. With FH Group® you will always Take Pride In Your Ride™.

To register for the Custom Seat Cover Limited Warranty, go to <https://www.fhgroupauto.com/warranty/>



2ND & 3RD ROW



INSTALLATION MANUAL

TOYOTA HIGHLANDER LE 2025



Keep your wealth and protected with the custom FH Group Toyota Highlander seat covers.

CM5028 2ND & 3RD ROWS

Video instructions are available at

Warning

- Machine wash cold, delicate cycle. Air dry only.
- Avoid sharp objects to protect covers from being scratched/damaged.
- We suggest wearing protective eyewear and gloves during installation.

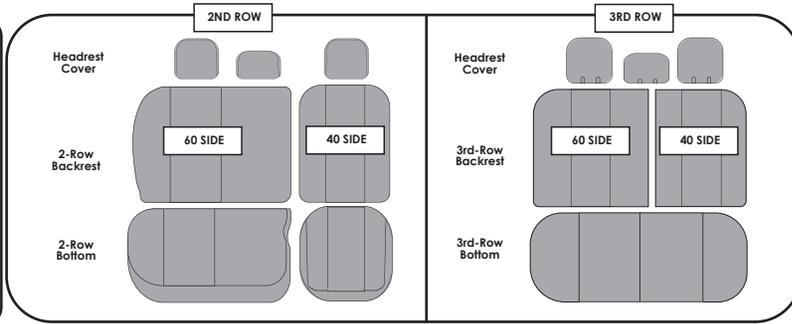

3RD ROW REMOVE MIDDLE HEADREST

40 SIDE & 60 SIDE REPEAT FOR BOTH SIDES	BACK VIEW	SHOULDER OF THE BACKREST
		FOLD DOWN

40 SIDE	60 SIDE
 METAL ROD	

REMOVE HEADRESTS

OPEN FLAPS

BACKVIEW

METAL ROD

1 To start, remove all headrests by pushing on the release button at the base of the headrests. Next, take the 2-Row Backrest (60 side) seat cover, unzip it and slide it over the bigger backrest making sure the cover goes under the middle seat seatbelt. Then, accommodate the cover so it follows the shape of the backrest and zip it together on the back of the seat.

2 Push the straps through the seat crevice to the back. Then, lift and open the original seat's flap by detaching the 2 straps from the bottom of the seat (as shown in the left corner image). Next, pull the seat cover straps and attach them to the seat's upholstery, reattach the seat's flap and attach the cover's back hook-and-loop attachments to the seat. Repeat the same process to install the other backrest.

7 To install the bottom seat cover, place the cover on the seat following the seat's shape. Then, attach the cover straps to the metal rod inside the seat crevice (just as you attached the backrest straps).

8 Locate the push clips on the front of the bottom seat cover and inset the clips inside the side seat crevice.

SIDE VIEW

ENJOY!

3 To install the 60 and 40 side bottom seat covers, place each cover on the bottom seat respectively. Then, push the buckle straps through the seat's crevice and connect them to the front straps underneath the seat as shown in the image.

4 Locate the push clips on the outer sides of the bottom seat covers and inset the clips inside the side seat crevice.

9 Reattach all the headrests to the seats and slide over the headrest covers.

10 Finally, make sure all covers fit properly and enjoy your new custom-fit seat covers!