




INSTALLATION IS THE KEY

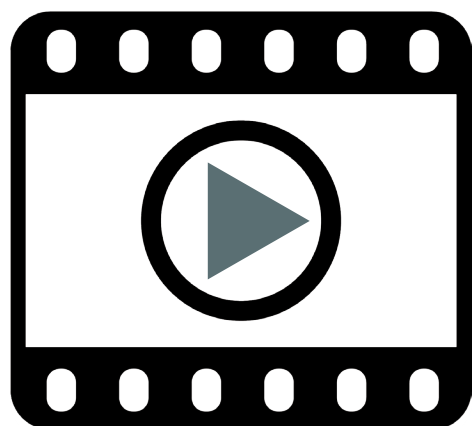

watch installation videos at
<https://www.fhgroupauto.com/installation/>

For more info, call 1-800-928-5518
or email us at info@fhgroupauto.com



NEED HELP?

Have Questions About Your Order?
FH Group® representatives are ready to help!


Watch Our Installation Videos
Watching our instructional videos FIRST will save time and answer most of your questions. With some patience and proper installation, you can enjoy beautifully fitted covers before you know it (turn over to learn where you can watch our videos).

Toll Free
1-800-928-5518
info@fhgroupauto.com


Installation Manual

FB201


Video instructions are available at <https://www.fhgroupauto.com/installation>

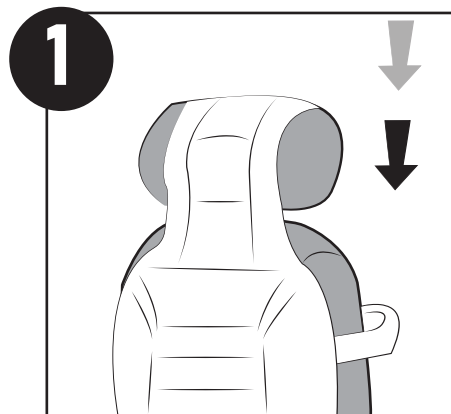


Locate the elastic band on the backrest portion of the cover. Stretch the band over and behind your seatback, gently pulling the cover down so it aligns with the seatback.

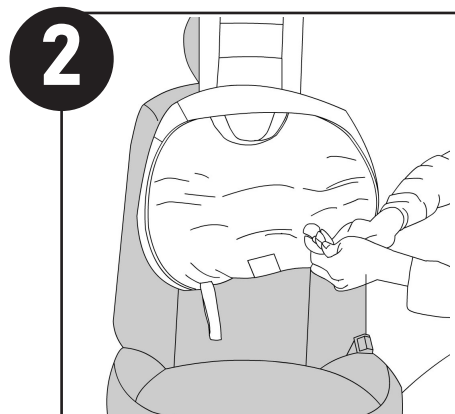


Remove the butterfly discs from the bag. Then lift the cushion's bottom portion to locate the cushion's elastic straps and loop each of the straps through a butterfly disc.



Optional: If your front seat is blocked by a flap, you can pull up the flap by locating the strap hooked to the bottom of the seat.

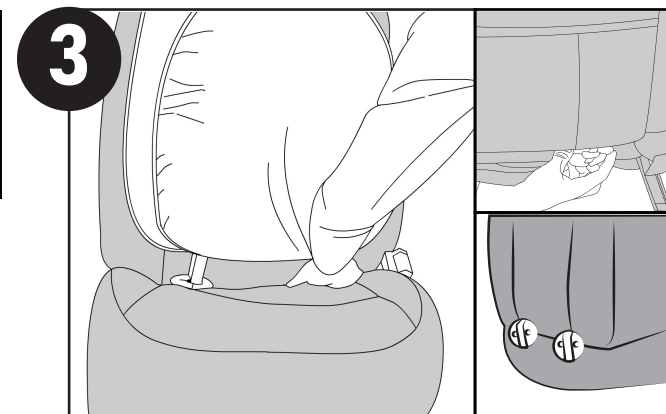


Push the butterfly discs through the center crevices of the seat. The back of your seat should look like the lower right-hand illustration.

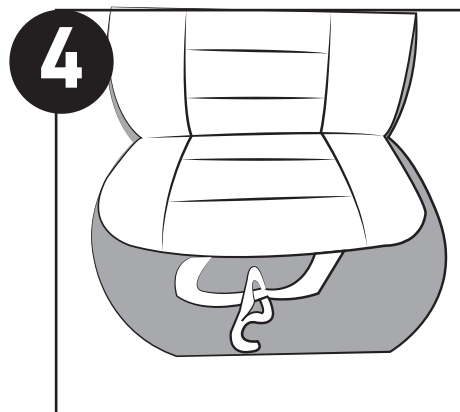

Attach the hook found in the bag to the bottom strap of the seat cover (you must pull open the hook).



Latch the hook underneath your seat. **WE SUGGEST WEARING PROTECTIVE EYEWEAR AND GLOVES FOR THIS STEP.** You may have to look underneath or feel around for a secure place to hook your seat cover.

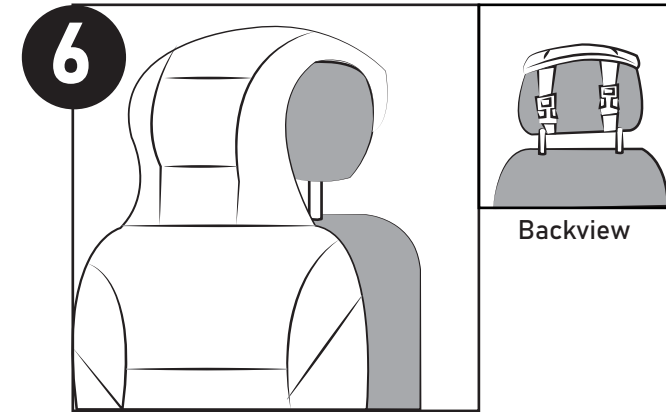

Once the cushion is in place, buckle the headrest's straps together.