



# Instruction Manual

FB090/ FB091/ FB092


Video instructions are available at <https://www.fhgroupauto.com/installation>

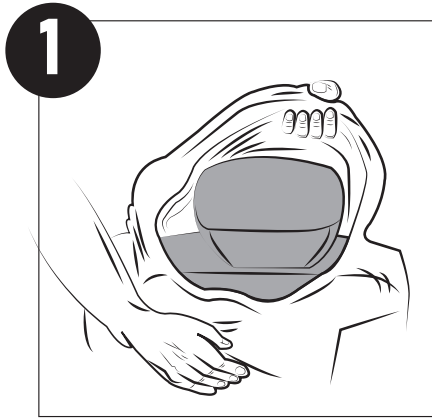


1  
Open the hook-and-loop seal at the top of the backrest cushion. Pull the cushion down over the seat until it covers the upper portion.

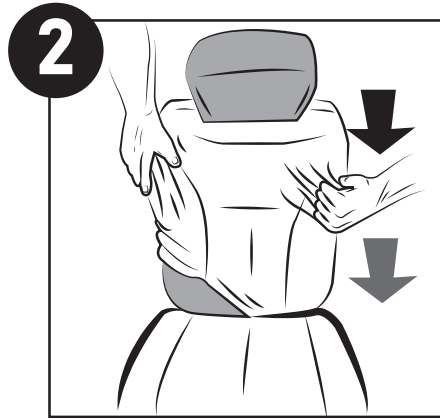


2  
Once the cushion is on snugly, close the top seal by securing the hook-and-loop pieces together.

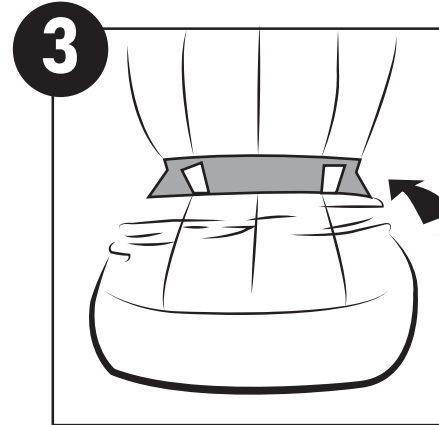


3  
Slide the bottom cover onto the car seat.

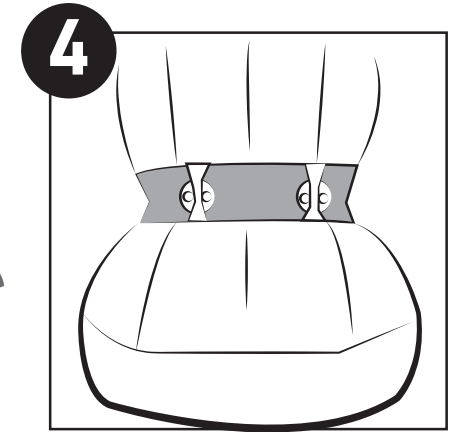


4  
Loop the butterfly discs to the straps of the upper and bottom portions of your cover. Your seat covers should look like the image above.

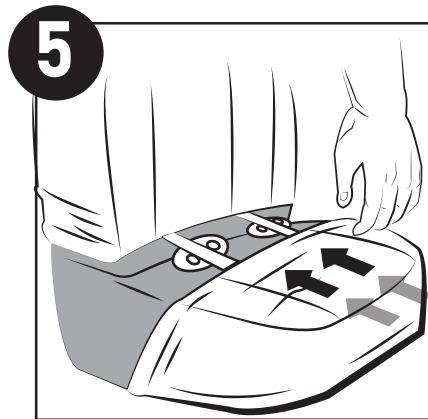


5  
Push the butterfly discs through the center crevice of the seat.

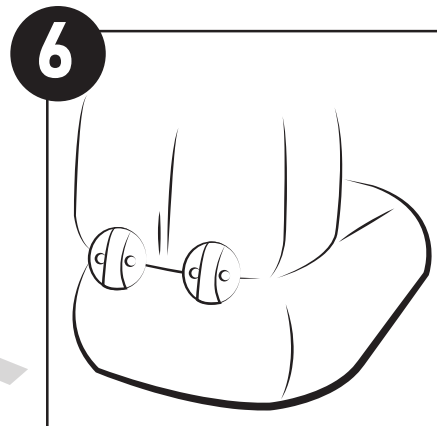

6  
The back of your seat should look like this.

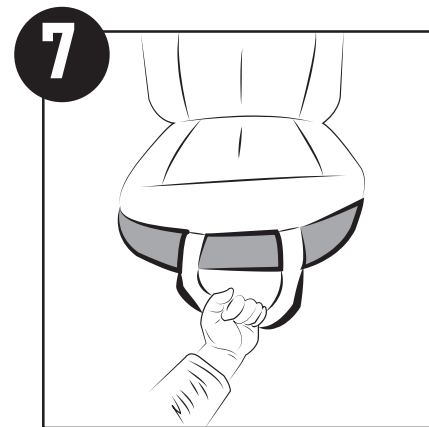

7  
For a more secure fit, use the hooks included in the bag to attach the front strap underneath the seat. WE SUGGEST WEARING PROTECTIVE EYEWEAR AND GLOVES FOR THIS STEP! You may have to look underneath or feel around for a secure place to hook the strap.

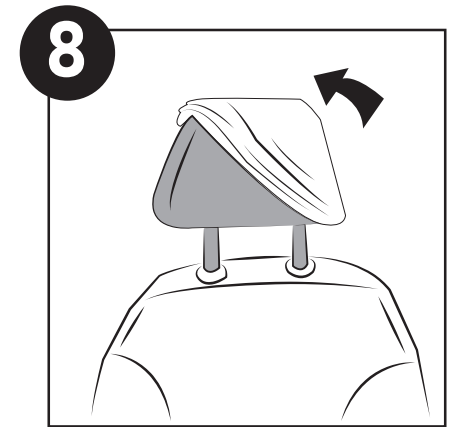

8  
Encase the headrest with the provided cover. Start from either side of the headrest and slide the cover over sideways for a secure fit.